




HYPER 63HD DTH HAMMER

Technical Brochure



Certificate Number 2446/00
ISO9001

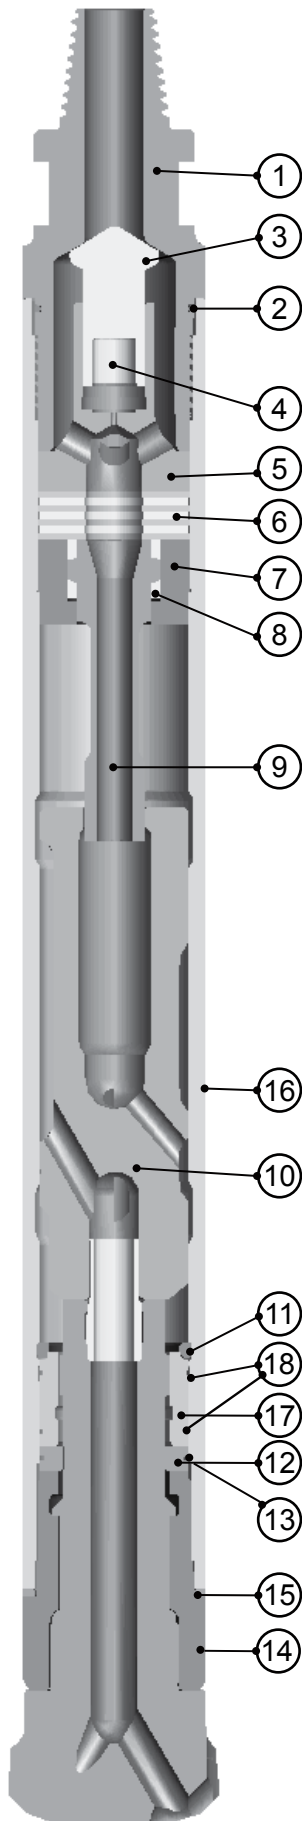

Hyper 63HD Valveless Hammer

165mm (6½") - 216mm (8½") diameter holes

The Hyper 63HD is a valveless D.T.H Hammer designed for drilling 165mm to 216mm (6½" to 8½") diameter holes. This heavy duty hammer is specifically designed for drilling through demanding and abrasive rock conditions.

The Hyper 63HD is supplied with 3½" api reg pin backhead as standard but other connections are available on request. A positive fitting water check valve guards against ingress of ground water when the air is shut off.

The Hyper 63HD Hammer is designed accept Button Bits with a shank and foot valve identical to Ingersoll Rand DHD 360. However The Hyper 63HD can also be supplied to accept the Mission SD6 and XL6 type of Button Bits.

Component Parts

Ref	Description	Part Number
1	Backhead	HSH633803MHD
2	Backhead 'O' Ring	HSH6114
3	Check Valve	IPRCV04
4	Check Valve Spring	IPRCVS04
5	Diverter	HSH6120
6	Compression Ring	HSH6128
7	Tube Holder	HSH6131
8	Tube Buffer (2)	HSH6129
9	Control Tube	HSH6330
10	Piston	HSH6103
11	Piston Retaining Ring	HSH6132
12	Bit Retainer Ring	HSH6337093
13	Bit Retainer 'O' Ring	HSH6137A093
14	Chuck	HSH6335093HD
15	Chuck Release Washer	HSH6326
16	Wearsleeve	HSH6300HD
17	Guide Bush	HSH6386
18	Guide Bush 'O' Rings (2)	HSH6386A
	Complete Hammer	BR63H01HD

Hammer Specification

	Imperial	Metric
Weight (less bit)	235 lbs	107 Kgs
Length (less bit)	48.38"	1229 mm
Outside dia.	5.7"	144.8 mm
Piston weight	49 lbs	22.3 Kgs
Stroke	4.25"	108 mm

Air Consumption

PSI	BAR	C.F.M	Cu. Mtr / min
150	10.3	339	9.6
200	13.8	522	14.8
250	17.2	730	20.7
300	20.7	958	27.1



Manufacturers of Rock Drilling Equipment

Turnoaks Business Park, Burley Close, Chesterfield, Derbyshire, United Kingdom. S40 2UB

Tel : +44(0)1246 544700 Fax : +44(0)1246 544701

Email : info@bulroc.com Web : www.bulroc.com