


Patriot® 80 Down Hole Hammer



FEATURES

- Outdistances competitive hammers in both speed and longevity
- Simplified hammer design with less internal components
- Drills at high frequency to provide less vibration and smooth operation
- More efficient design requires less air which equals fuel savings
- Designed to operate at pressures to 500 PSI (34.5 BAR)
- Ability to drill efficiently against high heads of water

AIR CONSUMPTION

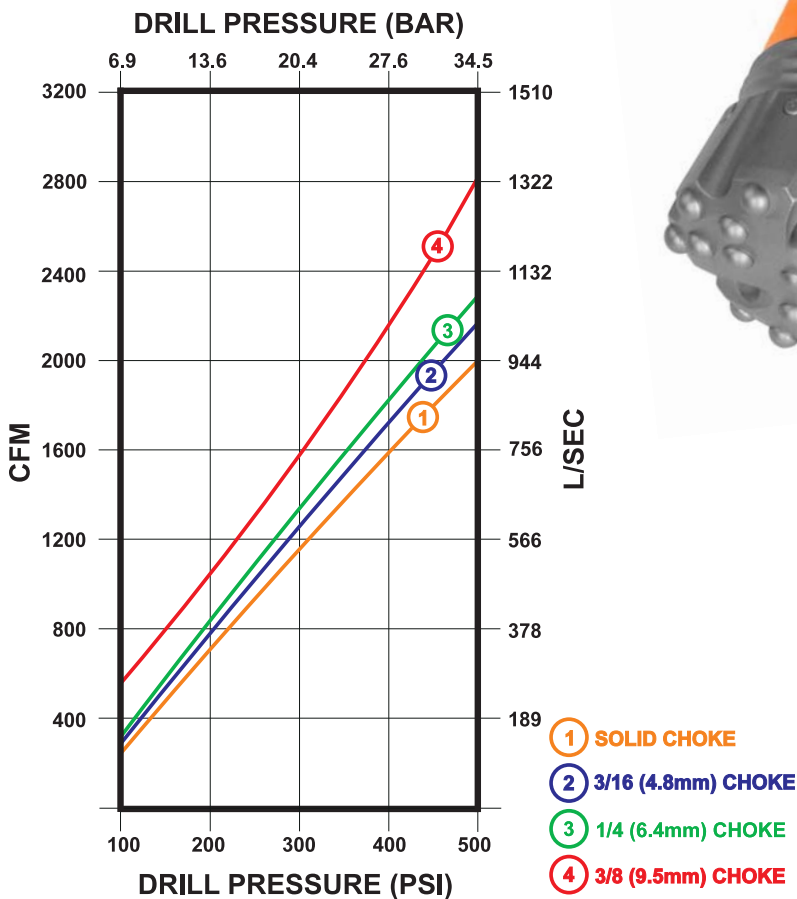


SPECIFICATIONS

Diameter	7-1/8"	181 mm
Bore	6"	152 mm
Stroke	3-3/4"	95 mm
Weight (Hammer only)	362 lbs.	164 kg
Length (Shoulder to Shoulder)	45-1/8"	1146 mm
Length (Shoulder to Bit Face)	49-7/8"	1267 mm
A.P.I. Reg. Threads	4-1/2	

- 1850 blows per minute at 350 PSI (23.8 BAR)
- Drills holes from 7-7/8" to 10" (200 mm - 254 mm) in diameter
- Accepts 380 bit shank

Down Hole Button Bits

Patriot® 80

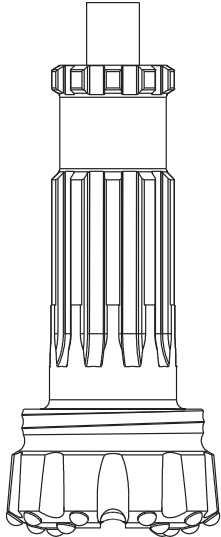

380 Bit Shank


DIAMETER
inches (millimeters)

WEIGHT*
pounds (kilograms)

FACES AVAILABLE

7-7/8"	(200 mm)	106 lbs.	(48.1 kg)
8"	(203 mm)	107 lbs.	(48.5 kg)
8-1/2"	(216 mm)	112 lbs.	(50.8 kg)
8-5/8"	(219 mm)	113 lbs.	(51.3 kg)
8-3/4"	(222 mm)	114 lbs.	(51.7 kg)
8-7/8"	(225 mm)	115 lbs.	(52.2 kg)
9"	(229 mm)	120 lbs.	(54.4 kg)
10"	(254 mm)	125 lbs.	(56.7 kg)

Concave



* Bit weights are approximate

FEATURES

- 3/4" (19 mm) diameter carbide buttons throughout face
- Chipways designed for faster hole cleaning
- Carbide buttons positioned for better fracture of rock providing faster penetration rates
- Several grades and types of carbide are available
- Other bit sizes may be available upon request

For More Information Contact:

Bob Lancaster
Northeast USA
(860) 933-1715

Ted Foust
Mid-Atlantic USA
(717) 579-7809

Carl Chidester
Appalachian USA
(304) 203-2408

Jeff Hay
Southeast USA
(478) 279-4834

Virginia Lenox
Western USA
(325) 456-0695

Kathy Wagoner
Oil & Gas
Western USA
(325) 456-0407

Bruce Palmer
U.S. Construction
Latin America
(860) 234-4823

Chris Beare
Europe - Middle East
Africa - India
+44 (0) 7785 934 361

Ian Speer
Australia
+61 (0) 400 077 165