

Mincon MP55SD5

Why Buy the Mincon MP55SD5?

The Mincon MP55SD5 is a Universal hammer that can be used in almost any drilling application. It is a field proven technology that delivers superior penetration rates versus other manufacturers.

Like all Mincon DTH hammers, the Mincon MP55SD5 maintains excellent operating pressure over an extended service life and overall is the tool you require to get the maximum out of all your equipment.

Mincon Products are all manufactured in house, and all processes are carried out under the one roof. This guarantees that the quality you “Expect” is always delivered.

Design Highlights:

- ▶ Patented features maximize energy output and reduce service requirements.
- ▶ Fewer internal components minimize service requirements.
- ▶ Valveless, high frequency design ensures smooth operation.
- ▶ Reversible hardened wear sleeve for optimum wear resistance even in the most abrasive conditions.
- ▶ Multi-start threads on backhead and chuck ensure easy coupling/uncoupling of hammer.
- ▶ Unique internal mount system eliminates the need for wear shims and special assembly tools.
- ▶ All critical internal components are heat treated under strict control to maximize tool longevity.
- ▶ An overall cost-effective and user friendly tool for use in the most demanding conditions.



Mincon MP55SD5


Applications:

- Blast Hole
- Water Well
- Environmental
- Exploration
- Construction

‘The Driller’s Choice’


“LEADERS IN THE FIELD OF DRILLING TECHNOLOGY”

MINCON MP55SD5 PARTS LIST & SPECIFICATION

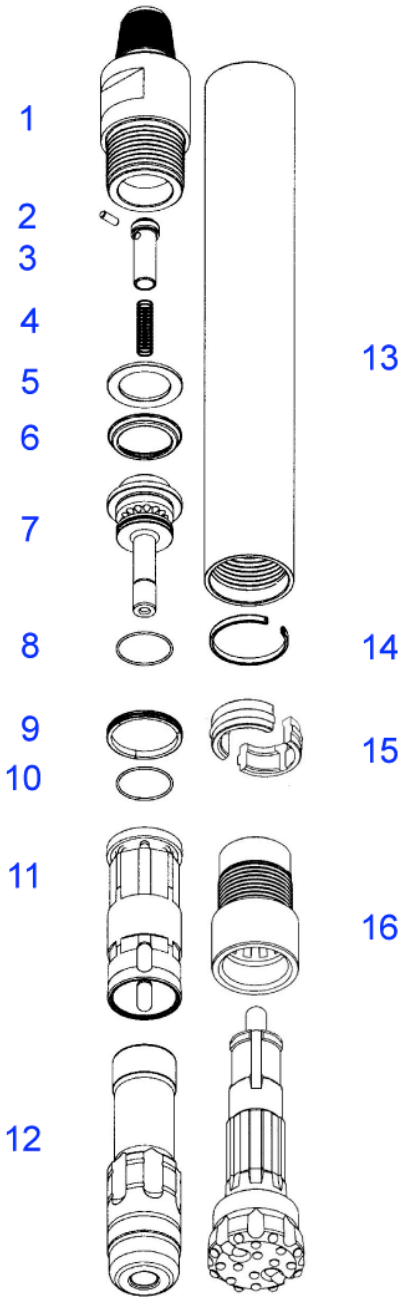

Item	Description	Part No.
	Mincon MP55SD5 Hammer	MBX501AS05
1	Backhead	MBX501BH02
2	Choke Blank	MB506CH01
	Choke 1/8" (3.2mm)	MB506CH02
	Choke 3/16" (4.8mm)	MB506CH03
3	Check Valve	MB502CV01
4	Spring	MB503SP01
5	Steel Make Up Ring	MB504SM01
6	Lock Ring	MB505LR01
7	Air Distributor	MB507DR01
8	O Ring	MB521OR01
9	Seating Ring	MB509SR01
10	O Ring	MB523OR01
11	Inner Cylinder	MB508IC02
12	Piston	MB510PN05
13	Wear Sleeve	MBX511WS02
14	Piston Retaining Ring	MB511PR01
15	Bit Retaining Ring	MB513BR04
16	Chuck	MBX514CK05
Outside Diameter		4.88" / 124mm
Minimum Bit Size		5.5" / 140mm
Spanner Flat Size		3.5" / 89mm
Length (Less Bit, Backhead Shoulder to Chuck)		39.9" / 1014mm
Bit Shank Type		SD5/4315
Backhead Thread		3 1/2" A.P.I. Reg. Pin
Piston Weight		33.6 Lbs / 15 Kgs
Wear Sleeve Discard Limit		4.400" / 111.8mm

OPERATING PRESSURE / AIR CONSUMPTION

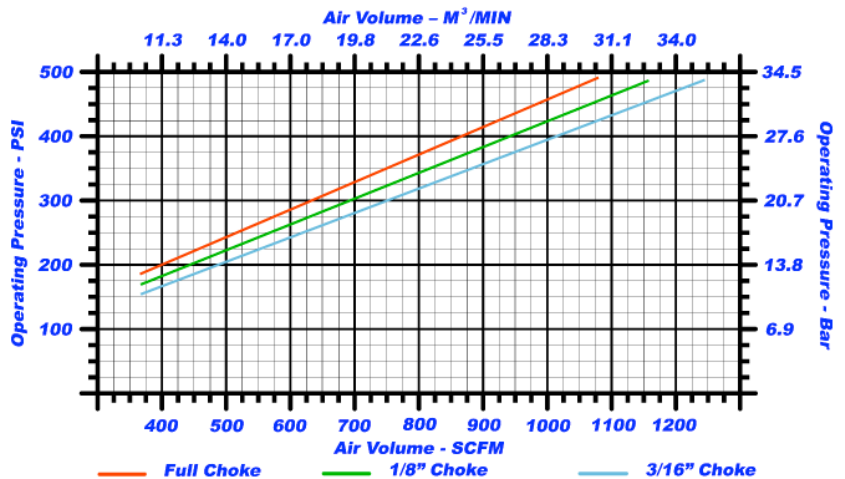

Mincon International Ltd

Shannon, Co. Clare

Ireland

Telephone: +353 61 361 099


Fax: +353 61 361 808

Email: mincon@mincon.com

Web: <http://www.mincon.com>

Distributed by:

ROCKDRILL OIL GRADE

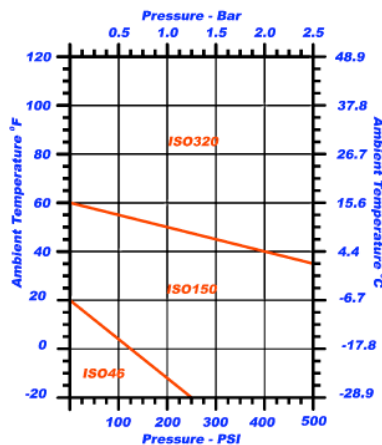

ROCKDRILL OIL CONSUMPTION

