


FEATURES

- Outdistances competitive hammers in both speed and longevity
- Simplified hammer design with less internal components
- Drills at high frequency to provide less vibration and smooth operation
- More efficient design requires less air which equals fuel savings
- Less overall parts promote easier maintenance
- Designed to operate at pressures to 200 PSI (13.6 BAR)
- Ability to drill efficiently against high heads of water
- Plate drive system to eliminate spline wear and galling

AIR CONSUMPTION



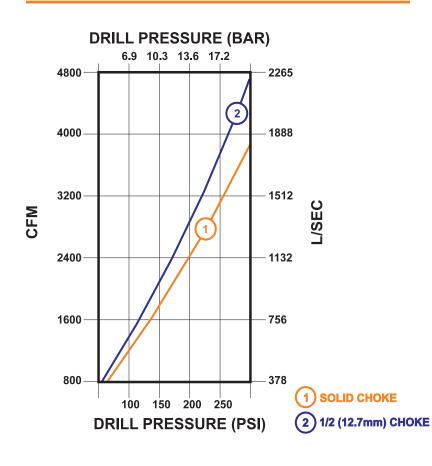


SPECIFICATIONS

Diameter	15-1/2"	394 mm
Bore	13-1/4"	337 mm
Stroke	4-1/2"	114 mm
Weight (Hammer only)	2523 lbs.	1144 kg
Length (Shoulder to Shoulder)	65-15/16"	167 cm
Length (Shoulder to Bit Face)	75-15/16"	193 cm
A.P.I. Reg. Threads	8-5/8	


- 1100 blows per minute at 200 PSI (13.6 Bar)
- Suitable for drilling holes from 18" to 30" (457 mm to 762 mm) in diameter
- Accepts C180 bit shank



Down Hole Button Bits



	DIAMETI inches (m	E R hillimeters)	WEIGHT* pounds (kiloş	G HT* ds (kilograms)		
	18"	(457 mm)	1029 lbs.	(468 kg)		
	20"	(508 mm)	1254 lbs.	(570 kg)		
	22 ["]	(559 mm)	1347 lbs.	(612 kg)		
	24"	(610 mm)	1616 lbs.	(735 kg)		
	26 ["]	(661 mm)	1751 lbs.	(796 kg)		
	28"	(711 mm)	2007 lbs.	(912 kg)		
٦	30"	(762 mm)	2275 lbs.	(1034 kg)		
			* Bit weights ar	e approximate		



FACES AVAILABLE

C180 Bit Shank

FEATURES

- Concave or Flat face design for advanced hole cleaning capabilities
- 3/4" (19 mm) diameter carbide buttons throughout face
- Several grades and types of carbide are available
- Significantly larger spline area for exceptional strength and transfer of torque
- Plate drive system for increased spline life
- Side wear buttons are standard on all bits
- Other bit sizes may be available upon request

For More Information Contact:									
Bob Lancaster Northeast USA (860) 933-1715		Mid-Atlantic USA Ap		Appala	Appalachian USA South		f Hay east USA 279-4834		
Virginia Lenox Western USA (325) 456-0695	Kathy Wa Oil & Western (325) 450	Ğas n USA	Bruce F U.S. Cons Latin Ar (860) 23	struction nerica	Chris Europe - <i>N</i> Africa +44 (0) 778	Niddle East - India	lan Speer Australia +61 (0) 400 077 165		